

## PDV-100 General Specifications


Measurand	Velocity		
Signal processing	Digital		
Frequency range	0 ... 22 kHz		
Velocity measurement ranges	3		
Peak velocity (mm s <sup>-1</sup> )	± 20	± 100	± 500
Scaling factor (mm s <sup>-1</sup> /V)	5	25	125
Velocity resolution <sup>(1)</sup> (µm s <sup>-1</sup> rms)	< 0.05	< 0.1	< 0.3
Velocity resolution (µm s <sup>-1</sup> /√ Hz)	< 0.02	< 0.03	< 0.1
Working distance <sup>(2)</sup>	0.2 m ... 30 m		
Laser safety	Eye safe class II visible HeNe laser		
Operating temperature range	5 °C ... 40 °C		
Relative humidity	max. 80 %, non-condensing		
<b>PDV-100 Output Signals</b>			
Output signal types	Analog and Digital		
<b>Analog velocity output</b>			
Output voltage range	± 4 V, 24 bit DAC		
Frequency range	0.5 Hz ... 22 kHz		
Dynamic range <sup>(3)</sup>	> 90 dB		
Calibration accuracy	± 1 % (20 Hz ... 22 kHz)		
<b>Digital velocity output</b>			
Electrical S/P-DIF <sup>(4)</sup> Interface	24 bit, 48 kSa/s		
Frequency range	0 ... 22 kHz		
Calibration accuracy	± 0.2 % (0.05 Hz ... 22 kHz)		
<b>Output filters</b>			
Digital low pass filter (FIR type)	1 kHz, 5 kHz, 22 kHz (-0.1dB), roll-off 120 dB/dec		
Analog high pass filter	100 Hz (-3dB), roll-off 60 dB/dec		
<b>PDV-100 Housing and Power</b>			
Dimensions (L x W x H)	300 mm x 63 mm x 129 mm		
Weight	2.6 kg		
Display	Illuminated 3 line LCD		
Protection rating	IP64 (dust and splashing water protected)		
Power requirements	11 V ... 14.5 V DC, max 15 W		
PDV-BS Transportation bag and battery kit	2 Rechargeable Li-Ion batteries for nominal 5 hours operation time		
<b>Compliance with Standards</b>			
Electrical safety	EN 61010 (IEC 1010)		
EMC Emission	EN 50081-1 (FCC Class B)		
EMC Immunity	EN 50082-1, EN/IEC 61000-6-2		
Laser safety	EN/IEC 60825-1 (CFR 1040.10, 1040.11)		
CE	Mark (EMC, laser safety, LVD)		

<sup>(1)</sup> The resolution is defined as the signal amplitude (rms) at which the signal-to-noise ratio is 0 dB in a 10 Hz spectral bandwidth (RBW), measured from 3M Scotchlite® tape.

<sup>(2)</sup> The maximum stand-off distance depends on the surface properties of the object.

<sup>(3)</sup> Defined as spurious free dynamic range (SFDR).

<sup>(4)</sup> S/P-DIF: Sony/Philips Digital Audio InterFace.



**Polytec GmbH (Germany)**  
 Polytec-Platz 1-7  
 76337 Waldbronn  
 Tel. + 49 (0) 7243 604-0  
 Fax + 49 (0) 7243 69944  
 info@polytec.de

**Polytec-PI, S.A. (France)**  
 32 rue Délizy  
 93694 Pantin  
 Tel. + 33 (0) 1 48 10 39 34  
 Fax + 33 (0) 1 48 10 09 66  
 info@polytec-pi.fr

**Lambda Photometrics Ltd. (Great Britain)**  
 Lambda House, Batford Mill  
 Harpenden, Herts AL5 5BZ  
 Tel. + 44 (0) 1582 764334  
 Fax + 44 (0) 1582 712084  
 info@lambdaphoto.co.uk


**Polytec KK (Japan)**  
 Hakusan High Tech Park  
 1-18-2 Hakusan, Midori-ku  
 Yokohama-shi, 226-0006  
 Kanagawa-ken  
 Tel. +81 (0) 45 938-4960  
 Fax +81 (0) 45 938-4961  
 info@polytec.co.jp

**Polytec, Inc. (USA)**  
 North American Headquarters  
 1342 Bell Avenue, Suite 3-A  
 Tustin, CA 92780  
 Tel. +1 714 850 1835  
 Fax +1 714 850 1831  
 info@polytec.com

Midwest Office  
 3915 Research Park Dr.,  
 #A12  
 Ann Arbor, MI 48108  
 Tel. +1 734 662 4900  
 Fax +1 734 662 4451

East Coast Office  
 16 Albert Street  
 Auburn, MA 01501  
 Tel. +1 508 832 0501  
 Fax +1 508 832 4667

# Portable Digital Vibrometer PDV-100

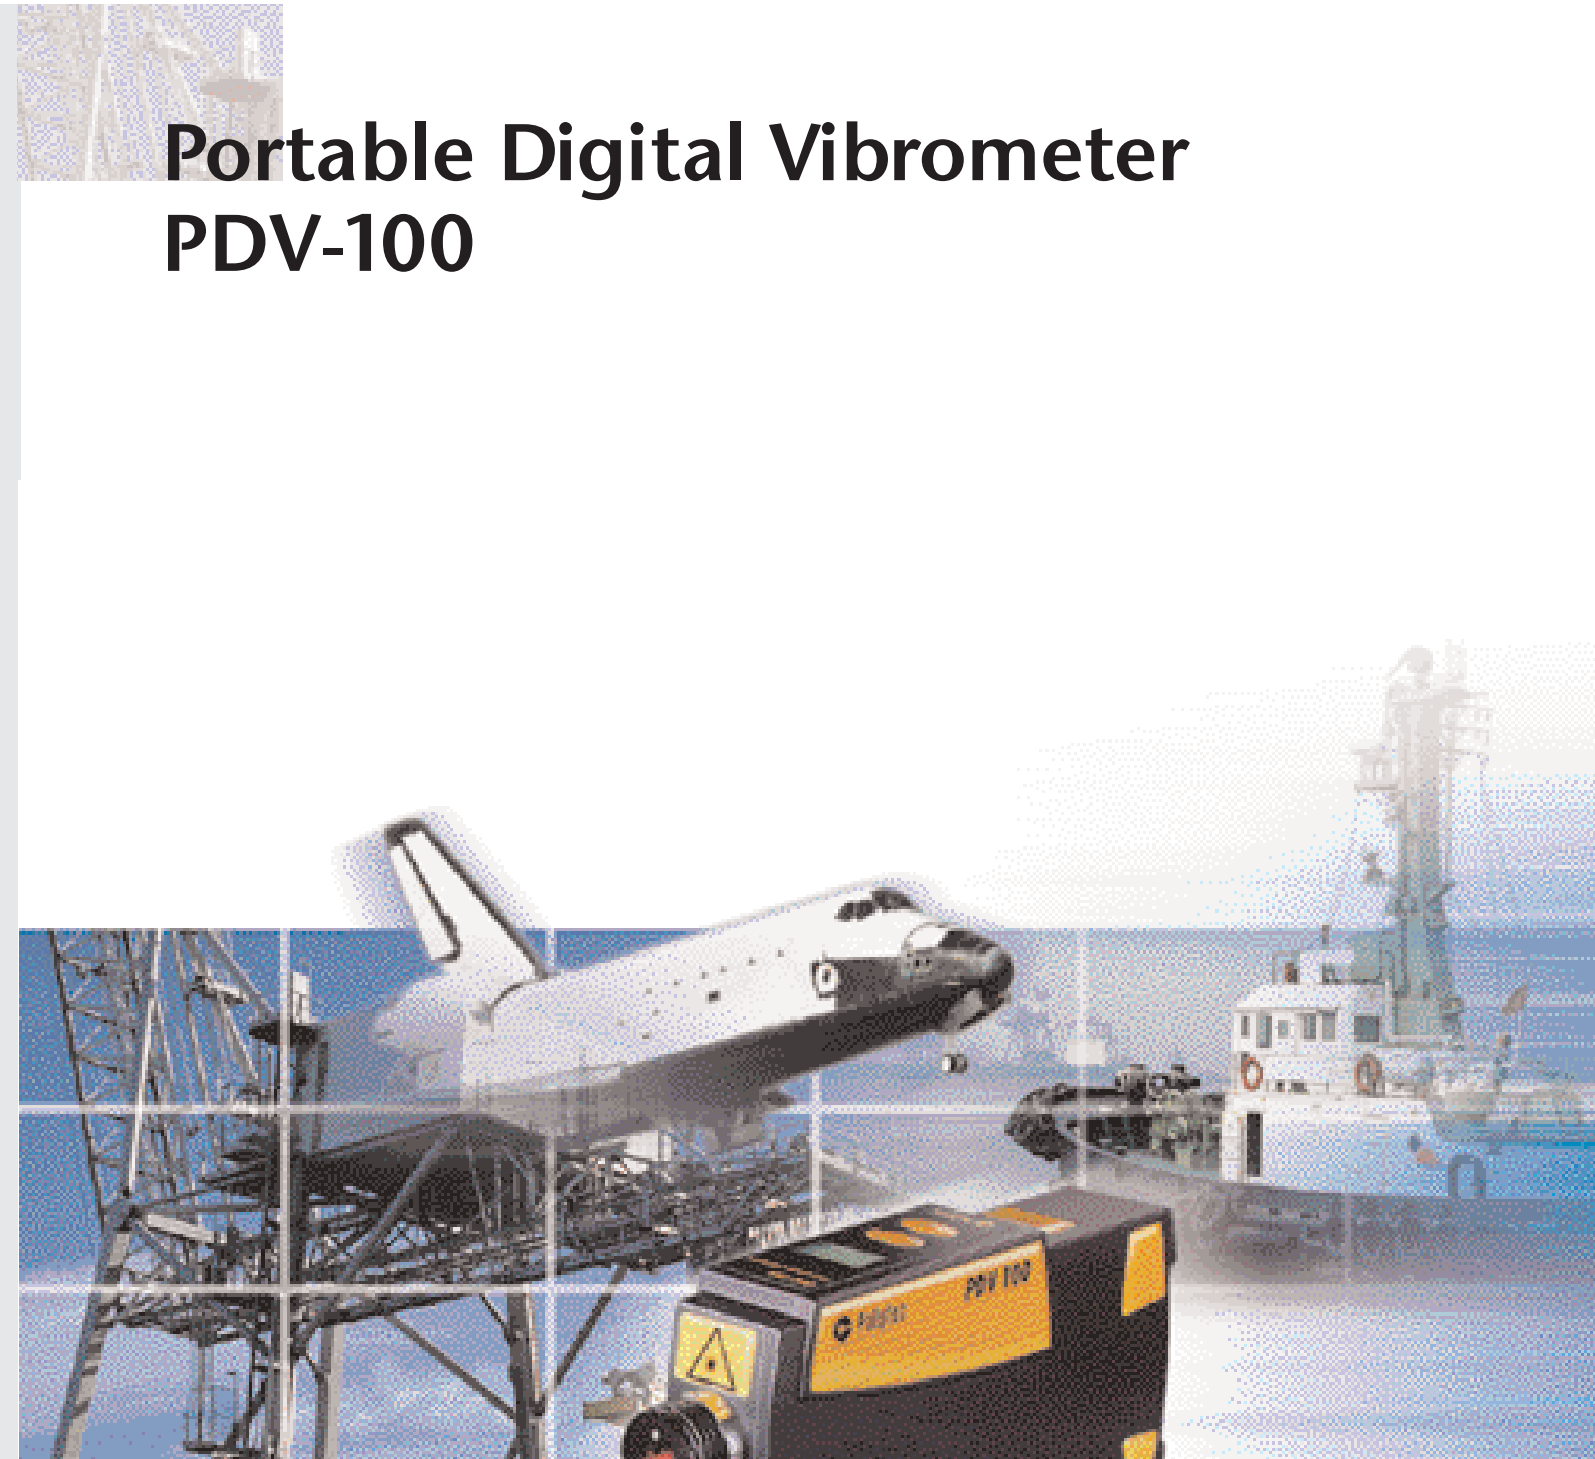

**High Resolution Digital  
Velocity Measurement**

- Portable
- Robust
- Lightweight

# PDV-100

## Introduction

Polytec's PDV-100 Portable Digital Vibrometer measures surface vibration velocity without contact, utilizing Laser Doppler Vibrometry (LDV) technology.

The unique combination of state-of-the-art optics, digital signal processing and Polytec design experience yields excellent measurement performance, ease-of-use and long-term calibration stability in a truly portable and robust package.



PDV-100 with transportation bag and laptop based signal-processing using S/P-DIF interface

## Features

- Non-contact velocity measurement in the frequency range 0 to 22 kHz
- 3 velocity ranges for highest resolution
- Digital signal processing
- Analog and digital signal outputs
- Variable working distance from 0.2 m up to 30 m
- Eye-safe visible laser
- Lightweight, ergonomic and rugged design, hermetic housing
- Low power consumption (batteries, wide voltage range AC mains adapter)

## Working with the PDV-100 is easy

Vibration measurements are made easy with the PDV-100. After focusing the laser beam on the vibrating object the measurement range is set via only two push buttons. An illuminated liquid crystal display shows the selected range, the amount of light returning to the PDV-100, and, if applicable, velocity over-range and low-battery warnings.

Selectable high and low pass frequency filters condition the velocity signal to suppress low-frequency background vibrations or unwanted high-frequency signals.


The analog velocity output interfaces to conventional analog signal processing and recording equipment. The digital velocity signal uses a transmission method proven in digital audio technology. It interfaces to digital inputs of modern recording devices or signal analyzers without any loss of accuracy.

Available accessories include the PDV-BS transportation bag with integrated lithium ion batteries for nominal five hours operation time and the OFV-S2 tripod.

## Advantages of digital signal processing

The PDV-100 digital signal processing provides superior performance:


- Improved velocity resolution
- Outstanding measurement linearity and accuracy
- Demodulation principle independent of aging and environmental influences
- Unequaled long-term calibration stability
- Digital low pass output filters with excellent properties
- Digital signal interface to data storage or processing guarantees data accuracy and minimizes EMC interference

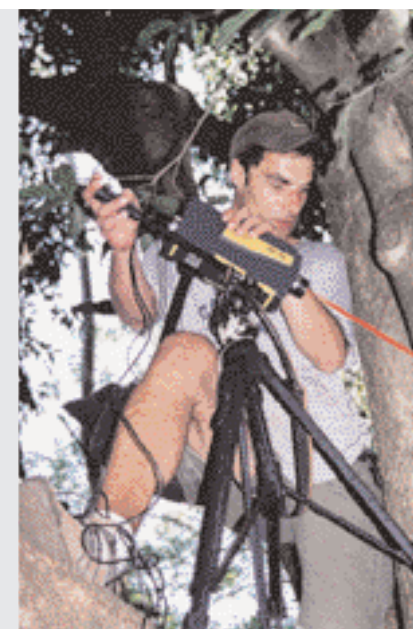

Scientific expedition using PDV-100 for vibration measurement of bees in South America jungle (Photo credit: Jarau/Hrncir, Institute of Zoology, Dept. of Neurobiology, Vienna University, Austria)

## A reliable tool for many applications

If you need a portable multi purpose non-contact vibration measurement system the PDV-100 is the ideal solution. In combination with lightweight signal processing equipment and the PDV-BS transportation bag providing power, machinery vibrations, difficult to access or hazardous objects can conveniently be measured.

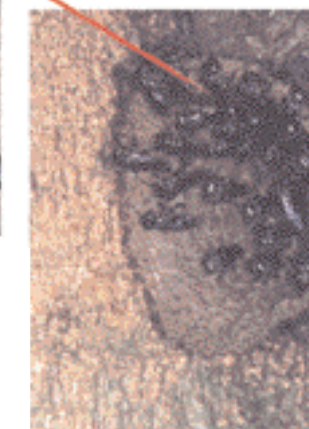

The PDV-100 is designed for non-contact vibration measurements where mobility and durability are important:


- Predictive maintenance of machinery
- Operating vehicles, trains or airplanes
- Buildings, bridges or other large outdoor structures
- Multi purpose field testing
- Scientific expeditions

## PDV-100 Standard and Optional Accessories

Included with PDV-100 are AC/DC power adapter (100–240 V AC, 50/60 Hz) with connecting cable, transportation bag, digital interface (S/P-DIF) cable (Triax / RCA), 1 sheet of reflective tape.

### Optional

- PDV-BS battery supply kit with transportation bag. Integrated lithium ion battery set (rechargeable), battery charger (100–240 V AC, 50/60 Hz) with mains cable and switching box. Weight and dimensions (including PDV-100): 4.4 kg, 370 mm x 160 mm x 150 mm
- PDV-DC cable for operating PDV-100 from a 12 V vehicle or cigarette lighter
- PDV-DCR cable for the battery kit from a 12 V vehicle power outlet or cigarette lighter socket
- OFV-S2 tripod with fluid stage

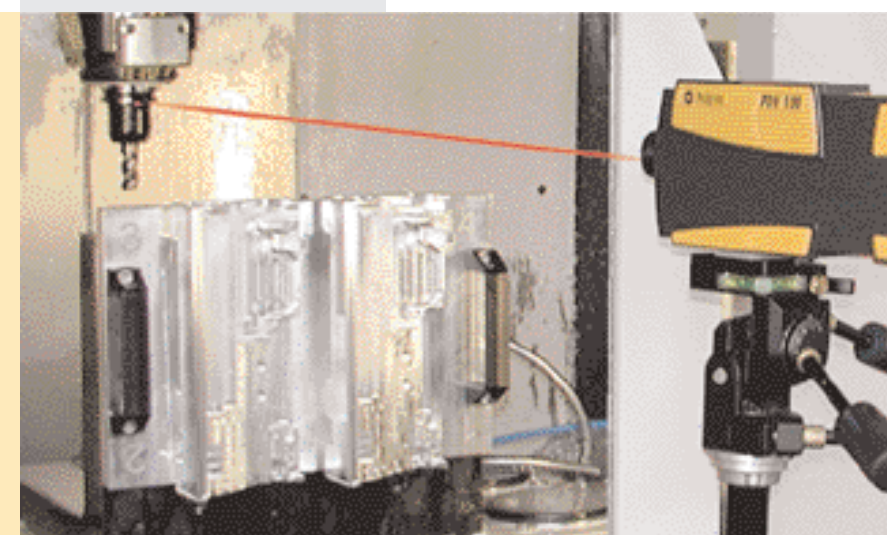

Predictive maintenance vibration measurements of machinery



PDV-100 with transportation bag PDV-BS